



www.elektrogas.valve-zone.com

MIXFLOW – ENERGY
80 – 314 Gdańsk,
Al. Grunwaldzka 303
Tel: +48 58 676 55 39
elektrogas@mixflow.com.pl



Autoryzowany Przedstawiciel marki:



VMR
VMR 60
VMR OTN

Safety solenoid valves for gas
Fast opening and fast closing type
DN8 ... DN150

VMR

VMR 60

VMR OTN

Safety solenoid valves for gas

Fast opening and fast closing type

Contents

Description	2
Features	2
Functioning and application	3
Technical specifications	4
Gas flow chart (pressure drop)	6
Ordering information	8
Special versions and options	9
Design, installation and servicing	10
Standards and approvals	11

Description

The VMR type valve is a fast opening single-stage solenoid valve, normally closed (open when energized). This type of device is suitable for air or gas blocking and releasing controls, required in gas power burners, atmospheric gas boilers, industrial kilns and others gas consuming appliances.

Features

VMR valves are made of aluminum alloy die-cast, with a wide range for inlet/outlet connections from DN 10 (3/8") up to DN 150 (6").

VMR OTN valves are made of hot-pressed brass with connections from DN8 (1/4") to DN15 (1/2").

Sealings are made of NBR-based rubber certified for use with gas (EN 549).

Suitable for use with air and non-aggressive gases included in the 1, 2 and 3 families (EN 437). Special versions suitable for aggressive gases, free of brass and with FPM seals.

Pipe connections meet Group 2 and backpressure sealing is compliant with Class A, according to EN161 requirements.



The whole range can be provided in Ex-proof execution, for use in Zones 2 and 22, according to 2014/34/EU Directive (ATEX).

The valve is open only when energized: if, for any reason, power supply goes down, the valve closes immediately (intrinsic safe).

Suitable for heavy-duty cycle operation and qualified for continuous service (100% ED).

Equipped with flow rate adjustment (except VMR OTN and models 4"-5"-6").

An incorporated fine mesh filter protects the valve seat and disc as well as downstream components and prevents dirty contamination (except VMR OTN and VMR 60).

A proof of closure switch or a visual indicator can be installed (see PCS-VI datasheet for details); in this case the valve has to be equipped with 1/8" connection on the bottom. Models from 2 1/2"-DN65 and above have this features, smaller models can have it on request.

Provided with 1/4" pressure test points on two sides in the inlet chamber (except VMR OTN), to connect manometers, pressure switches, leakage detectors or other gas equipment. Models from 2 1/2"-DN65 and above are provided with pressure test points also in the outlet chamber (on request on 1 1/4"-1 1/2"-2" models).

The coils are provided with terminal box or with ISO 4400 plug.

All components are designed to withstand any mechanical, chemical and thermal condition occurring during typical service. Effective impregnation and surface treatments have been used to improve mechanical sturdiness, sealing and resistance to corrosion of the components.

Valves are 100% tested by computerized testing machineries and are fully warranted.

Functioning and application

The VMR type valve is a safety shutting device using auxiliary power supply. When it is de-energized, the spring pushes on the seal disc, keeping the gas passage closed. In the inlet chamber there is the gas line pressure which forces on the disc, increasing the closing function and improving the seal. When the coil is powered, the valve opens rapidly against the strength of the spring and gas pressure. The flow may be adjusted using the regulating screw on the top (see the installation and service instructions). If the power supply is shut off, the valve rapidly closes, interrupting the gas flow.

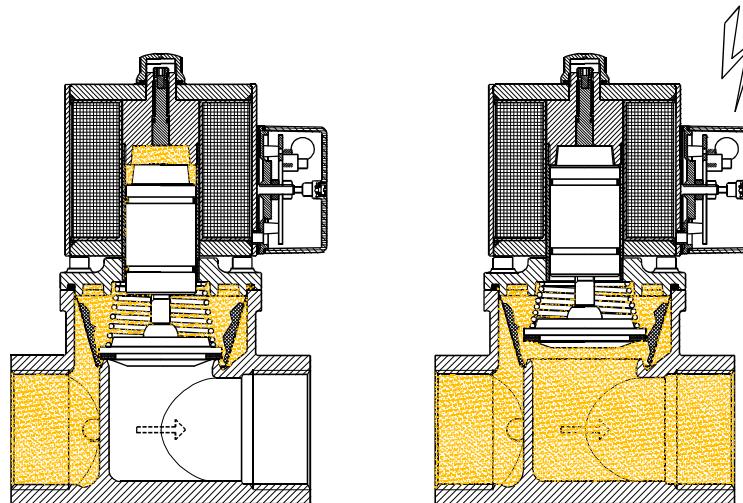


Fig.1

This kind of valve is normally installed as safety and regulating device in gas trains, for industrial applications and gas firing systems.

Figure 2 shows an example of installation with other *Elektrogas* devices.

- 1 = Ball valve **VSG**
- 2 = Filter **FG**
- 3 = Pressure regulator **R**
- 4 = Tightness control **LD**
- 5 = Gas pressure switch **PSG**
- 6 = Valve position visual indicator **VI**
- 7 = Fast opening solenoid valve **VMR****
- 8 = Slow opening solenoid valve **VML**
- 9 = Tightness control pressure switch
- 10 = Valve position electrical indicator **PCS**
- 11 = Burner pressure gauge **MG**
- 12 = Push button valve **ME**

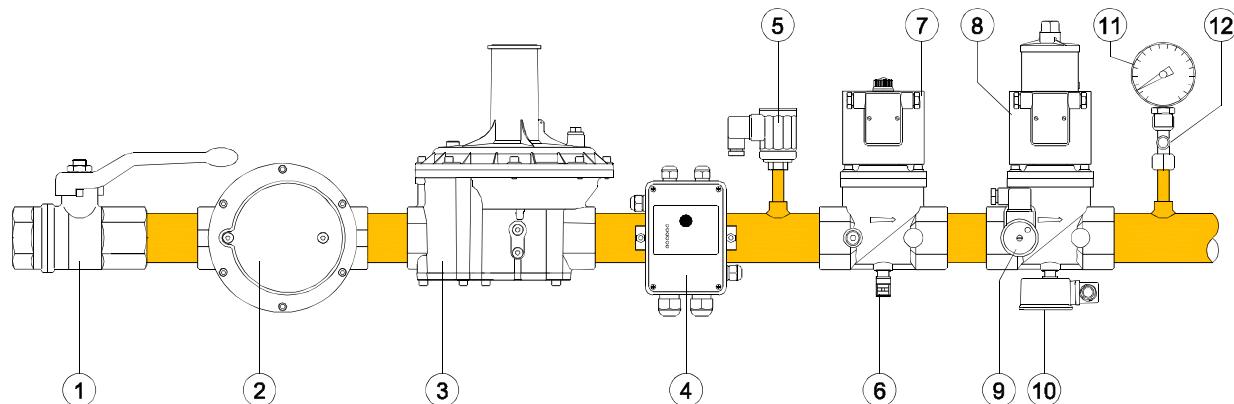


Fig.2

Technical specifications

Tab. 1

Connections		Internal threaded EN 10226-1 from Rp1/4 to Rp2½ or ANSI-ASME B1.20 from 1/4" NPT to 2" ½ NPT Flanged ISO 7005 PN16 from DN40 to DN150 or ANSI-ASA-ASME B16.5 class 150 from 2" to 6"										
Voltage ratings		230 VAC 50/60 Hz 120 VAC 50/60 Hz 110 VAC 50/60 Hz 24 VAC/DC 12 VAC/DC										
Voltage tolerance		-15% to +10%										
Ambient temperature Media temperature		-15°C to +60°C (+5°F to +140°F)										
Max. operating pressure		200 mbar (3 psig)	360 mbar (5 psig)	500 mbar (7 psig)	6 bar *	(90 psig)						
Max test pressure		1 bar (15 psig)	9 bar *	(130 psig)								
Closing time		< 1 second										
Opening time		< 1 second										
Gas strainer		600 µm (0.02 in) (except VMR OTN and VMR 60)										
Enclosure		IP54 (NEMA 3) optional IP65 with cable (NEMA 4)										
Cable gland		M20x1,5 for terminal box PG 9 for ISO plug										
Wires cross-section		2,5 mm ² max. (AWG 12) for terminal board 1,5 mm ² max. (AWG 14) for ISO plug										
Electrical safety		Class I (EN 60335-1)										
Coil winding insulation		Class H (200°C, 392°F)										
Coil thermal resistance		Class F (155°C, 311°F)										
Materials in contact with gas		Aluminum alloy, Brass, Stainless steel, Plated steel Anaerobic adhesive, Nitrile rubber (NBR), Fluoroelastomer (FPM), Polytetrafluoroethylene (PTFE)										

(*) Operating pressure lower than 200mbar (3psig) not advisable

Tab. 2

Power Consumption [W]	200 mbar (3 psig)					360 mbar (5 psig)					500 mbar (7 psig)					6 bar (90 psig)				
	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V
1/4" OTN	O 12	15	12	12	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	H 12	15	12	12	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/8"-1/2" OTN	O 16	20	16	16	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	H 16	20	16	16	16	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/8"-1/2"	O 25	20	25	20	20	-	-	-	-	-	20	20	20	-	-	20	20	20	20	-
	H 25	5	25	20	20	-	-	-	-	-	20	5	20	-	-	20	5	20	20	-
3/4"-1"	O 25	35	30	30	30	-	-	-	-	-	35	45	35	-	-	35	45	35	30	-
	H 25	9	30	30	30	-	-	-	-	-	35	11	35	-	-	35	11	35	30	-
1"1/4"-1"1/2"-2"	O 120	80	80	65	65	-	-	-	-	-	180	180	180	-	-	180	180	180	65	-
	H 30	20	20	65	65	-	-	-	-	-	45	45	45	-	-	45	45	45	65	-
2"1/2"-3"	O 180	180	180	160	-	240	240	240	-	-	-	-	-	-	-	240	240	240	-	-
	H 45	45	45	15	-	60	60	60	-	-	-	-	-	-	-	60	60	60	-	-
4"	O 280	280	280	210	-	320	320	320	-	-	-	-	-	-	-	320	320	320	-	-
	H 70	70	70	20	-	80	80	80	-	-	-	-	-	-	-	80	80	80	-	-
5"- 6"	O 320	360	320	-	-	360	360	360	-	-	-	-	-	-	-	-	-	-	-	-
	H 80	90	80	-	-	90	90	90	-	-	-	-	-	-	-	-	-	-	-	-

O – opening power consumption

H – holding power consumption

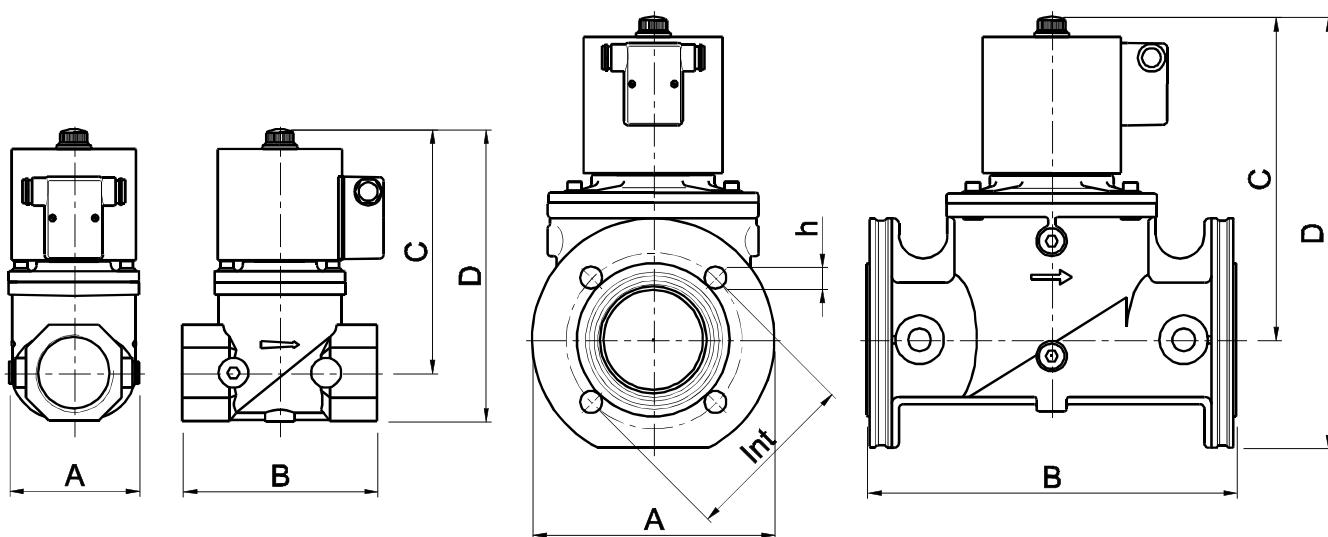


Fig.3

Tab. 3

Type and connections	VMR OTN (brass)	VMR (aluminum)	Overall dimensions					Weight [Kg] [lbs]
			A	B	C [mm] [in]	D	int	
Rp1/4	30	46	66,5	75				0,27
1/4"NPT	1,18	1,81	2,62	2,95				0,6
Rp3/8	30	58	95	110				0,4
3/8"NPT	1,18	2,28	3,74	4,33				0,9
Rp1/2	30	58	95	110				0,4
1/2"NPT	1,18	2,28	3,74	4,33				0,9
Rp3/8	88	77	126	142				1,4
3/8"NPT	3,46	3,03	4,96	5,59				3,1
Rp1/2	88	77	126	142				1,4
1/2"NPT	3,46	3,03	4,96	5,59				3,1
Rp3/4	88	96	145	168				2,5
3/4"NPT	3,46	3,78	5,71	6,61				5,5
Rp1	88	96	145	168				2,5
1"NPT	3,46	3,78	5,71	6,61				5,5
Rp1 1/4	120	153	191	224				5,7
1" 1/4NPT	4,72	6,02	7,52	8,82				12,6
Rp1 1/2	120	153	191	224				5,7
1" 1/2NPT	4,72	6,02	7,52	8,82				12,6
Rp2	106	156	195	234				6
2"NPT	4,17	6,14	7,68	9,21				13,2
Rp2 1/2	180	218	254	300				11,6
2" 1/2NPT	7,09	8,58	10,00	11,81				25,6
DN40	165	196	195	271	110	4x18	7,4	
-	-	-	-	-	-	-	-	
DN50	165	196	195	271	125	4x18	7,4	
2"ANSI ¹	6,50	7,72	7,68	10,94	4,75	4x3/4	16,3	
DN65	200	305	266	355	145	4x18	14	
2" 1/2ANSI	7,87	12,01	10,47	13,98	5,50	4x3/4	30,9	
DN80	200	305	266	355	160	8x18	14	
3"ANSI	7,87	12,01	10,47	13,98	6,00	4x3/4	30,9	
DN100	250	350	352	452	180	8x18	33	
4"ANSI	9,84	13,78	13,86	17,80	7,50	8x3/4	72,8	
DN125	310	460	430	600	210	8x18	58	
5"ANSI	12,20	18,11	16,93	23,62	8,50	8x7/8	127,9	
DN150	310	460	430	600	240	8x23	60	
6"ANSI	12,20	18,11	16,93	23,62	9,50	8x7/8	132,3	

(¹) Flanged connection as optional kit

Gas flow chart

(Pressure drop)

dP [inch WC]

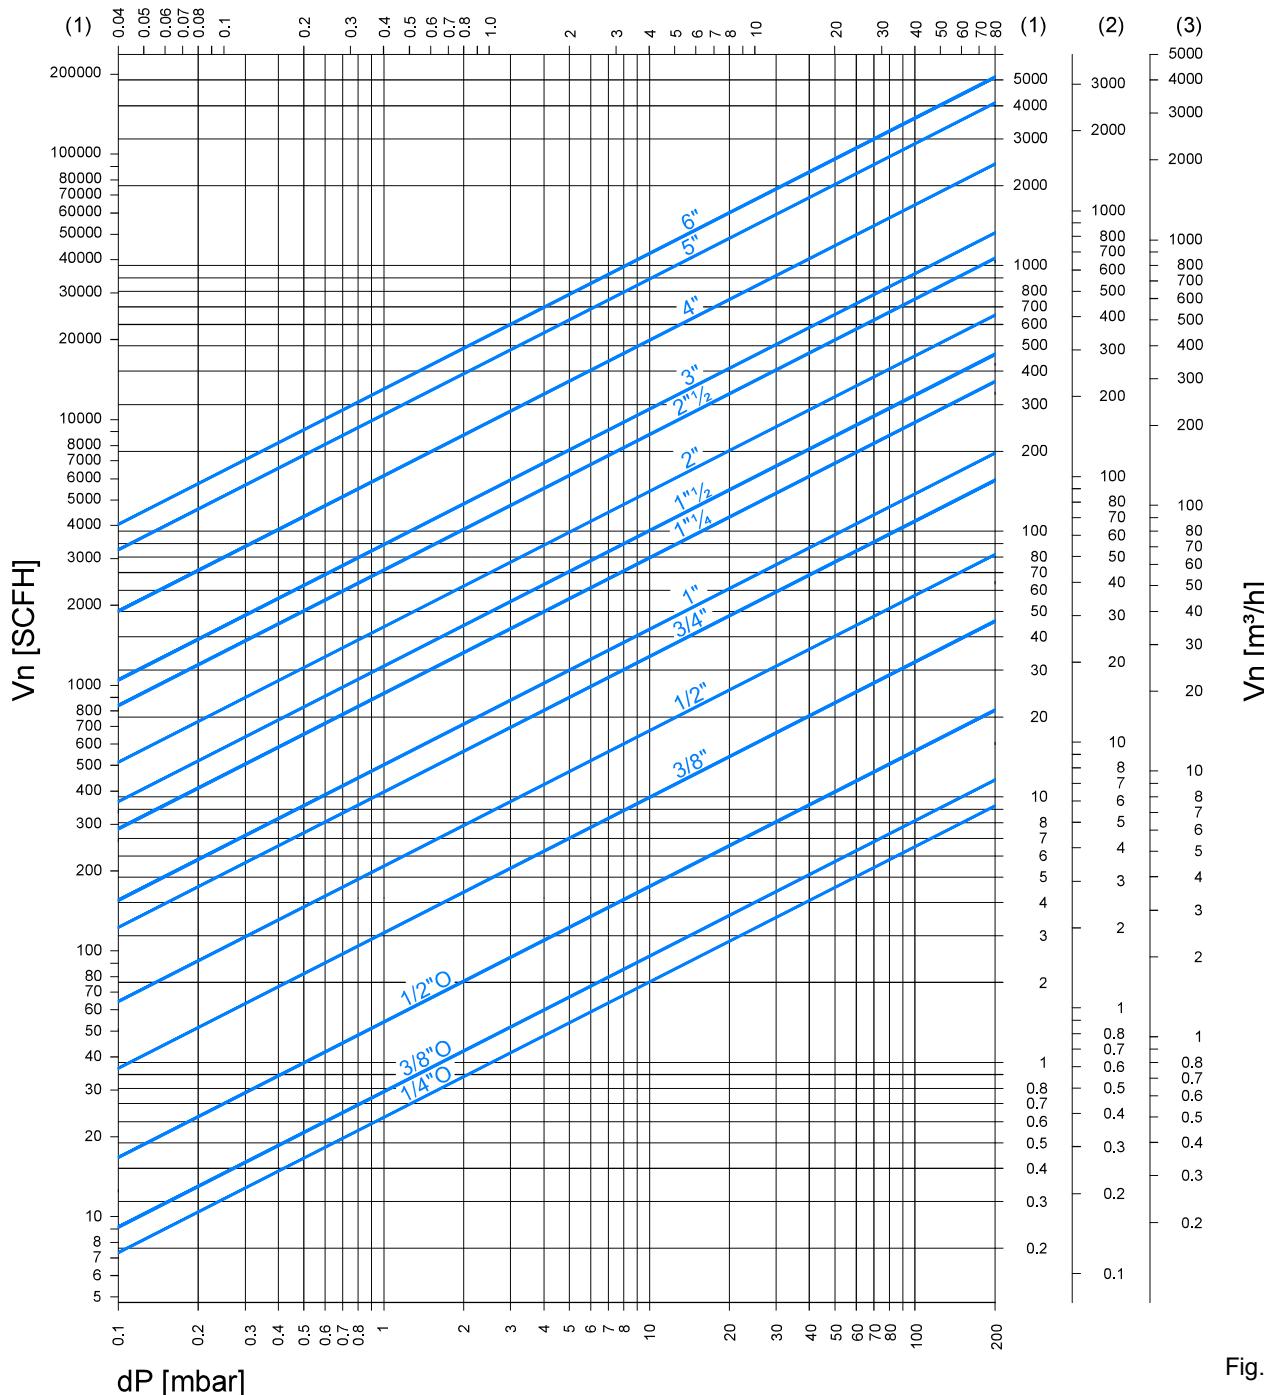


Fig. 4

Formula of conversion from air to other gases

Tab. 4

$$V_{GAS} = k \cdot V_{AIR}$$

$$k = \sqrt{\frac{\rho_{AIR}}{\rho_{GAS}}}$$

Gas type	Density ρ [Kg/m³]
(1) Natural gas	0,80
(2) LPG	2,00
(3) Air	1,225

15°C, 1013 mbar, dry

When the flow read on the diagram is referred to operating pressure instead of standard conditions, the pressure drop Δp read on the diagram must be multiplied for the factor: (1+ relative pressure in bar)

Example:

In the 2" solenoid valve with an air flow of 80 m³/h at standard conditions, there is a pressure drop $\Delta p = 5$ mbar.

If we consider that 80 m³/h is the flow at 200 mbar of inlet pressure, then the pressure drop to be consider is:

$$\Delta p = 5 \times (1+0,2) = 6 \text{ mbar}$$

Normally, pressure drop and flow rate for the valves are read from the gas flow diagram. However, the valves can also be chosen in accordance with the characteristic "Kvs value" which is shown in table 5.

The selection of the valve requires the calculation of the Kv under the operating conditions.

Considering only subcritical pressure drops:

$$\Delta p < \frac{p_1}{2}$$

Kv can be calculated with the formula:

$$Kv = \frac{Vn}{514} \sqrt{\frac{\rho(t+273)}{\Delta p \cdot p_2}}$$

where

Vn = flow rate at standard conditions [m³/h]

Kv = flow factor [m³/h]

ρ = density [Kg/m³]

p_1 = absolute inlet pressure [bar]

p_2 = absolute outlet pressure [bar]

Δp = differential pressure p_1-p_2 [bar]

t = media temperature [°C]

To the Kv value calculated from operating conditions we add an allowance of 20%, to obtain the minimum Kvs value which the valve should have:

Kvs > 1,2 Kv

Tab. 5

Kvs	1/4"O	3/8"O	1/2"O	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	DN65	DN80	DN100	DN125	DN150
m ³ /h	0,55	0,7	1,3	2,9	4,8	9,5	12	22	29	40	65	65	80	148	250	315



Valve must be selected considering the following:

- Pressure drops $\Delta p \leq 0,1p_1$ are recommended and $\Delta p > p_1/2$ are always unadvisable
- Flow velocities $w \leq 15$ m/s are recommended and $w > 50$ m/s are always unadvisable.

Ordering information

Tab.6

	VMR	1	-5	N	.B	J	
Valve type							
Size							
0	3/8"	6	2"				
1	1/2"	7	2 1/2"				
2	3/4"	8	3"				
3	1"	9	4"				
35	1 1/4"	93	5"				
4	1 1/2"	95	6"				
Max. Operating pressure							
-2	200 mbar (3 psig)						
-3	360 mbar (5 psig)						
-5	500 mbar (7 psig)						
-60	6 bar (90 psig)						
Variants							
none	Rp internal thread / ISO PN16 flange						
F	Flanged connection (1 1/2"-2" only)						
N	US market version (FM approved - NPT thread / ANSI flange)						
T	Threaded connection (2 1/2" only)						
Supply voltage							
none	230V 50/60Hz (120V 50/60Hz with "N" variant)						
B	110V 50/60Hz (120V AC on request)						
C	24V AC/DC						
D	12V AC/DC						
Special versions (some may be present concurrently)							
L	Low power (when not standard)						
P	Proof of closure (POC) for US market only						
J	Biogas						
K	Coke oven gas (COG)						
HF	Hydrogen						
Y	NPT thread / ANSI flange						
I	Electrical connection with ISO 4400 plug						
M	Bottom connection for disc position indicator (for valve till 2")						
T	Transparent cover to see led on electronic board						
T1	Transparent cover and ISO 4400 plug						
O	IP65 protection with 1.5 m cable						
O1	IP65 protection with ISO 4400 plug						
G	4 pressure points (for valves 1 1/4" to 2")						
X	Ex execution for zone 2 and 22 (see optional paragraph for details)						
Z	Anodization of housing and external aluminum parts						
Z1	Epoxy body coating and anodization of inner aluminum parts						

Models available:

Tab.7

	200 mbar (3 psig)					360 mbar (5 psig)					500 mbar (7 psig)					6 bar (90 psig)				
	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V	230V	120V	110V	24V	12V
3/8"	● ¹	● ¹		●	●						●	●	●			●	●	●	●	●
1/2"	● ¹	● ¹	●	●	●						●	●	●	●		●	●	●	●	●
3/4"	●	●	●	●	●						●	●	●	●		●	●	●	●	●
1"	●	●	●	●	●						●	●	●	●		●	●	●	●	●
1 1/4"	●	●	●	●	●						●	●	●	●		●	●	●	●	●
1 1/2"	●	●	●	●	●						●	●	●	●		●	●	●	●	●
2"	●	●	●	●	●						●	●	●	●		●	●	●	●	●
2 1/2"	●	●	●	●	● ²		●	●	●							●	●	●	●	
3"	●	●	●	●	● ²		●	●	●							●	●	●	●	
4"	● ²	● ²	● ²	● ²	● ^{2,3}		● ²	● ²	● ²							● ²	● ²	● ²	● ²	
5"	● ²	● ²	● ²				● ²	● ²	● ²											
6"	● ²	● ²	● ²				● ²	● ²	● ²											

● Available

⁽¹⁾ Provided with encapsulated coil and ISO 4400 plug

⁽²⁾ Without flow adjustment

⁽³⁾ Class B

Valve type
VMR 10TN
B .T1
Size and max. operating pressure
01OTN 1/4" brass body - 200 mbar (3 psig)

0OTN 3/8" brass body - 200 mbar (3 psig)

1OTN 1/2" brass body - 200 mbar (3 psig)

Variants
none Rp internal thread

N US market version (FM approved - NPT thread)

Supply voltage

(provided with encapsulated coil and ISO 4400 plug)

none 230V 50/60Hz (120V 50/60Hz with "N" variant)

B 110V 50/60Hz (120V AC on request)

C 24V AC/DC

D 12V AC/DC

Special versions (some may be present concurrently)

Electrical connection with ISO 4400 plug (standard)

Y NPT thread

T1 Transparent cover and ISO 4400 plug

O1 IP65 protection with ISO 4400 plug

X Ex execution for zone 2 and 22 (see optional paragraph for details)

Special versions and options

- **L:** valves with terminal box and size 3/8"-1" can be supplied with special electronic board which provides full power for the opening stage, then it switches to low power consumption for the holding stage (standard from 1"1/4 to 6").
- **J:** models with aluminum body can be supplied in special version for aggressive gases such as biogas. They are free of brass and NBR. In this case customer shall check compatibility between valve materials and gas contents.
- **K:** models with aluminum body from 3/8" to 4" and working pressure till 500mbar can be supplied in special version for aggressive and dirty gases such as COG. They are free of brass and NBR and have additional protection of internal mechanism. As these gases usually have high content of hydrogen, tightness test is performed with helium. In this case customer shall check compatibility between valve materials and gas contents.
- **HF:** valves can be manufactured with additional treatment and tightness test with helium, so that they are suitable to be used with hydrogen.
- **Y:** valves can be provided with NPT threads or ANSI flanges instead of Rp thread or ISO PN 16 flanges.
- **I:** valves can be provided with electrical connection made by a standard plug ISO 4400.
- **M:** valves from 3/4" to 2" can be equipped with G1/8 connection on the bottom to fit a closed position indicator switch (PCS) or visual indicator (VI) (standard from DN65 to DN150).
- **P:** valves from 3/8" (3/4" for 6bar models) to 4" are available with proof-of-closure switch (POC), complying with NFPA 86 requirements. A factory adjusted SPDT switch inside an enclosure mounted on the bottom of the valve, provides an electrical signal indicating valve position. A two-colored led gives also a visual indication of the valve position (Red = valve open, Green = valve closed).
- **T:** valves can be provided with transparent cover and led which lights up when electrical power is supplied.
- **T1:** valves can be provided with transparent cover to see led light when coil is powered and connection with standard plug ISO 4400.

- **O:** enclosure class can be increased up to IP65. The valves will be provided with a sealed terminal box and cable set.
- **O1:** enclosure class of connection with standard plug ISO 4400 can be increased up to IP65 with additional sealing.
- **G:** models 1"1/4, 1"1/2 and 2" can have additional G1/4 pressure test points in the outlet chamber (standard from DN65 to DN150).
- **X:** valves can be provided with EX execution for use in Zones 2 and 22, according to 2014/34/EU Directive (ATEX):

category	II 3 G,D
protection mode	Ex ec IIA T4 Gc X or Ex ec IIB+H2 T4 Gc X (HF version)
	Ex tc IIIB T135°C Dc X or
	Ex tc IIIC T135°C Dc X (IP65 version)
ambient temperature	-15 / +40 °C

- **Z:** aluminum valves can be supplied with anodized housing and external components, to withstand aggressive environments.
- **Z1:** aluminum valves can be supplied with epoxy body coating and anodized aluminum inner components, to withstand aggressive gases.

Design, installation and servicing

To assure a proper and safe operation, as well as a long service life of the valve, consider the following recommendations during the design of the system where the valve will be installed:



- ✓ Ensure that all the features of your system comply with the specifications of the valve (gas type, operating pressure, flow rate, ambient temperature, electrical voltage, etc.).
- ✓ Valve may be mounted with coil in horizontal or vertical position, not upside down. Coil may be oriented 360 degrees in any direction.
- ✓ In the event of vertical pipe, the flow direction should be from bottom to top.
- ✓ After removing the end caps make sure no foreign body will enter into the valve during handling or installation (e.g. swarf or excessive sealing agent).
- ✓ A gas filter should be always installed upstream the valve.
- ✓ Ensure that installing area is protected from rain and water splashes or drops.
- ✓ Perform leak and functional tests after mounting.
- ✓ The continuous service (100% ED) causes inevitable coil heating, depending on working environment. Never install the valve close to walls or other equipment. To improve the coil cooling, install the valve allowing free air circulation.
- ✓ Perform maintenance according to service instructions at least once a year (most often for aggressive gases).
- ✓ Due to seals aging, to ensure safe operation, we recommend the valve replacement after 10 years from the date of manufacture stamped on the product. The heavy cycle operation may reduce the expected lifetime.
- ✓ This control must be installed in compliance with the rules in force.
- ✓ Make sure all works are performed by qualified technicians only and in compliance with local and national codes.
- ✓ To prevent product damage and dangerous situations, read carefully the instructions supplied with the product before use.



Standards and approvals

The product complies with the essential requirements of the following European Directives and their amendments:



2016/426/EU (Gas Appliances Regulation)
2014/68/EU (Pressure Equipment Directive)
2014/34/EU (ATEX) when shown upon the product
2014/30/EU (Electromagnetic Compatibility)
2014/35/EU (Low Voltage Directive)
2011/65/EU (RoHS II)

CE-Reg.-No. **0063AQ1350**
CE-Reg.-No. **PED/0497/3136/16**




The product complies with the Technical Regulations TP TC 004/2011-016/2011-020/2011-032/2013 of Russia, Belarus and Kazakhstan.

Declaration of Conformity: **№ RU Д-IT.РA01.В.08271/18**



The product is approved for Australia, certificate **GMK 10624** issued by IAPMO R&T Oceana on the basis of norm AS 4629.



The valves meet the requirements of functional safety of electrical systems according to the European standard IEC EN 61508 and are certified for systems up to SIL3.

Certificate No.: **UV IT 22 SIL 0118**



The product (*) is suitable for applications complying with NFPA 86 (Class 7400).
Factory Mutual Approval Identification: **0003061781**

(*) Notice: special version applies



Quality Management System is certified according to UNI EN ISO 9001.



www.elektrogas.valve-zone.com

MIXFLOW – ENERGY

80 – 314 Gdańsk,
Al. Grunwaldzka 303
Tel: +48 58 676 55 39
elektrogas@mixflow.com.pl



The information in this document contains general descriptions of technical options available and based on current specifications.
The company reserves the right to make changes in specifications and models as design improvements are introduced, without prior notice.
Visit Elektrogas website for updates and further details.

Autoryzowany Przedstawiciel marki: **elektrogas®**

Elettromeccanica Delta S.p.A.
Via Trieste 132
31030 Arcade (TV) – ITALY

phone +39 0422 874 068
www.delta-elektrogas.com
info@delta-elektrogas.com

Copyright © 2024
All rights reserved